



Warning:


This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

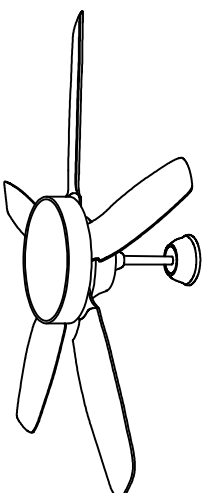


Steps of installation

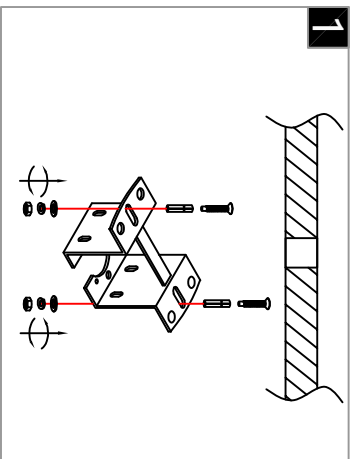

Fix the mounting bracket to the ceiling.

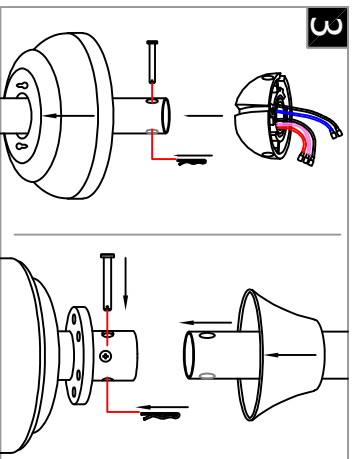


Insert the arc head into the tube. align it with the hole, insert the lock pin, then insert the pin into the lock pin, and tighten the screws. Then, pass through the top cover, the conical cover, and the wires, insert the cylindrical part of the motor, align it with the hole, insert the lock pin, then insert the pin into the lock pin, and tighten the screws. Then, press down and cover the conical cover.

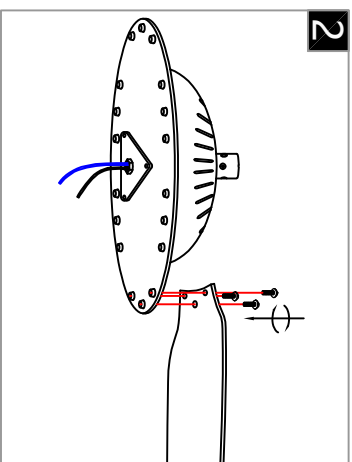


Product style diagram


Align the fan blades with the holes at the bottom of the cover, and tighten the screws.

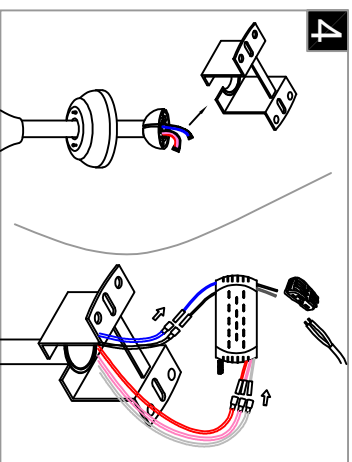


Insert the round tube into the installation bracket, (aligning the concave and convex positions), then connect the wires of the power driver and the wires coming out of the round tube, and connect the wires of the power driver and the wires on the ceiling using the terminal.

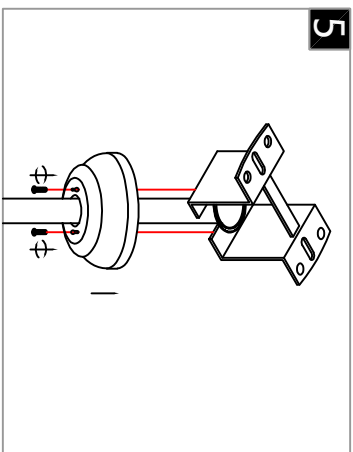

Align the holes of the top cover with the holes at the bottom of the installation bracket, tighten the screws.

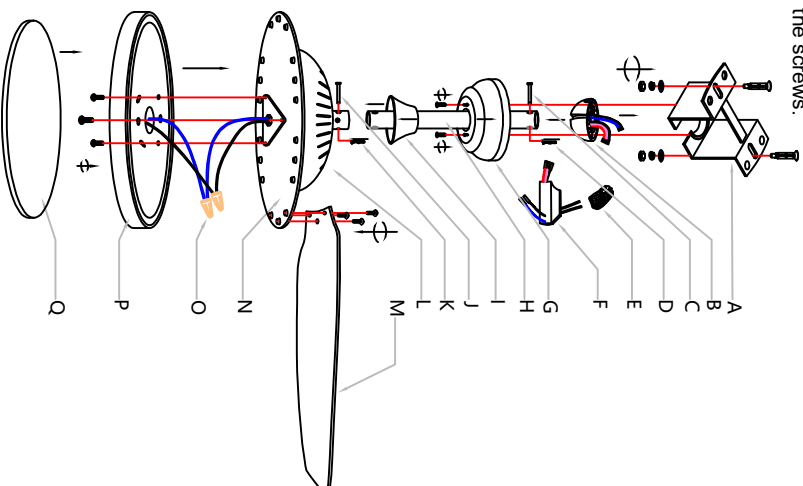

Align the holes of the disc with the screw holes of the triangular component at the bottom of the motor, and tighten the screws. Stick the light source onto the disc, and then connect the wire of the light source to the wire of the motor. Finally, insert the lampshade onto the disc.

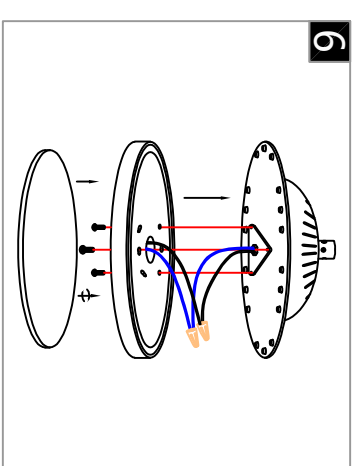

First, align the fan blades (M) with the screw holes on the periphery of the motor (L) and tighten the screws. Next, insert the arc head (B) into the tube (H), align it with the hole, insert the lock pin (C), then insert the pin (D) into the lock pin (C), and tighten the screws. Then, pass through the top cover (G), the conical cover (I), and the wires, insert the cylindrical part of the motor (L), align it with the hole, insert the lock pin (J), then insert the pin (K) into the lock pin (J), and tighten the screws. Then, press down and cover the conical cover (I). Next, fix the mounting bracket (A) to the ceiling.

Then, insert the arc head (B) into the mounting bracket (A) (make sure the concave and convex positions are aligned), and connect the power supply (F) wire to the wire on the arc head (B). Connect the power supply (F) wire to the wires on the ceiling through the quick connector (E).

Then, align the holes of the top cover (G) with the holes at the bottom of the mounting bracket (A), and tighten the screws.

Next, align the holes of the disc (P) with the screw holes of the triangular component at the bottom of the motor (L), and tighten the screws. Stick the light source onto the disc (P), and then connect the wire of the light source to the wire of the motor (L). Finally, insert the lampshade (Q) onto the disc (P).

① ALLOFF	⑥ LIGHT ON/OFF
② FAN Speed control gears 1-6	⑦ FAN/OFF
③ Natural Wind Mode	⑧ Reverse
④ Forward	⑨ FAN 4-hour Timer
⑤ FAN 1-hour Timer	⑩ FAN 2-hour Timer