



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

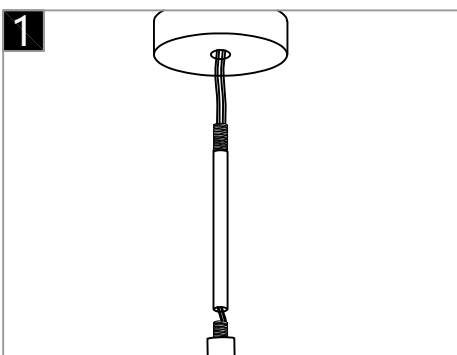


Pass the wires on the lamp stand through the connecting rod and insert them into the top cover. Then install the connecting rod onto the top cover and the lamp stand. Finally, install the glass cover into the snap-in slot on the lamp head.

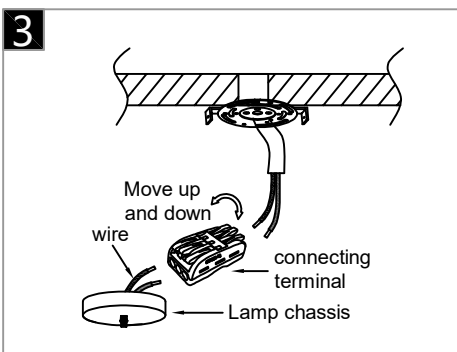


Connect the wires to the terminal blocks. Usually, the neutral wire (white) and the live wire (black).

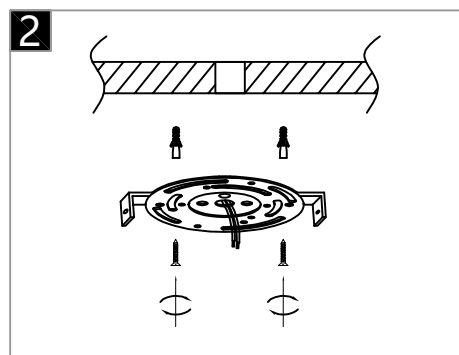

Attach the mounting plate to the ceiling with self-tapping screws.

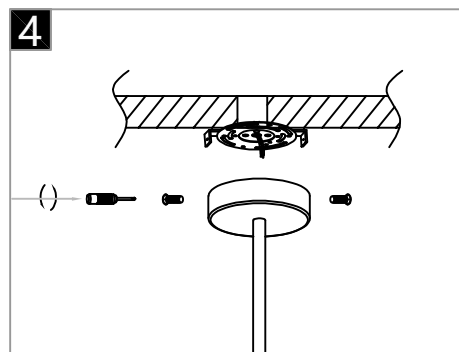


Align the hole on the side of the integral lamp canopy with the hole on the mounting plate and lock it tightly with screws.

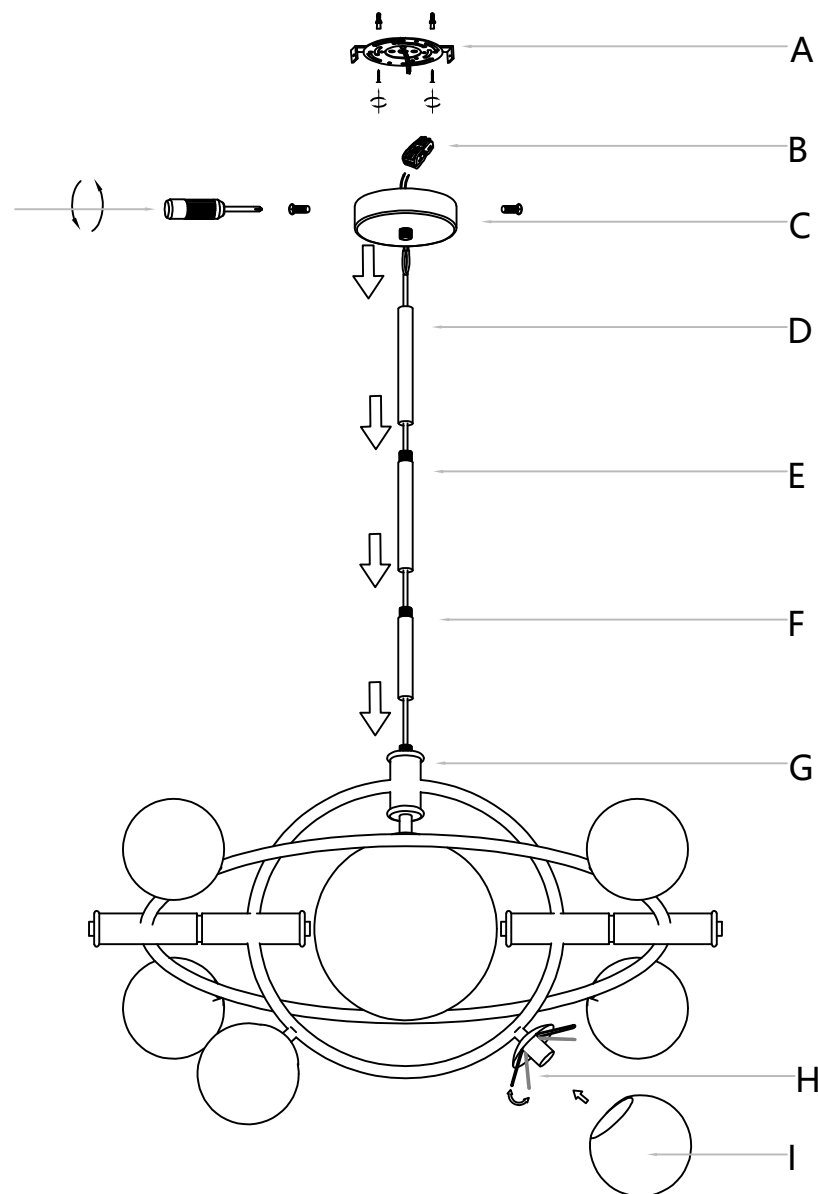

First, assemble the short rod (F) onto the lamp body (G). Next, assemble the middle rod (E) onto the short rod (F). Then, attach the long rod (D) to the middle rod (E). Then, assemble the top cover (C) onto the long rod (D). Next, attach the mounting plate (A) to the ceiling. Then, connect the wires on the top cover (C) to the wires on the ceiling using the terminal blocks (B). Then, align the holes on the side of the top cover (C) with the holes on the mounting plate (A), and tighten the screws. Then, pinch the spring (H) inward and insert the ball (I) into it.


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

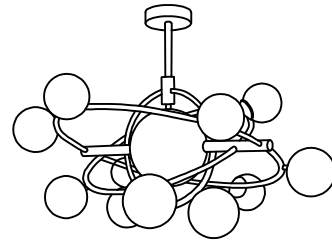


Product style diagram


Steps of installation

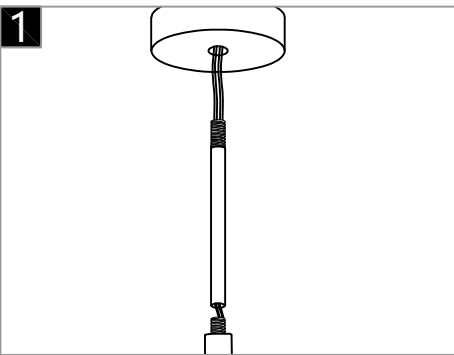


Pass the wires on the lamp stand through the connecting rod and insert them into the top cover. Then install the connecting rod onto the top cover and the lamp stand. Finally, install the glass cover into the snap-in slot on the lamp head.

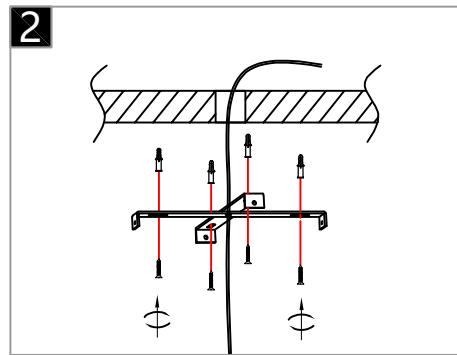


Attach the mounting plate to the ceiling with self-tapping screws.

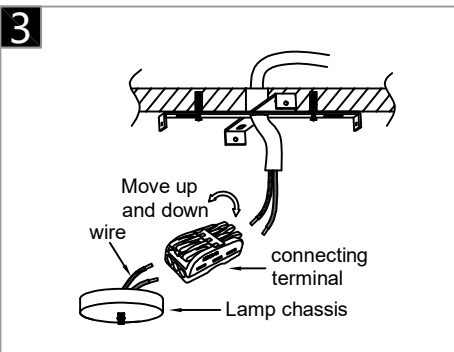

Connect the wires to the terminal blocks. Usually, the neutral wire (white) and the live wire (black).

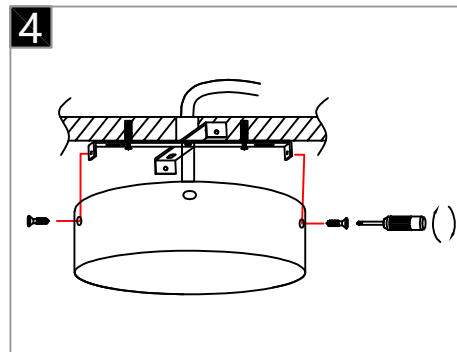

Align the hole on the side of the integral lamp canopy with the hole on the mounting plate and lock it tightly with screws.

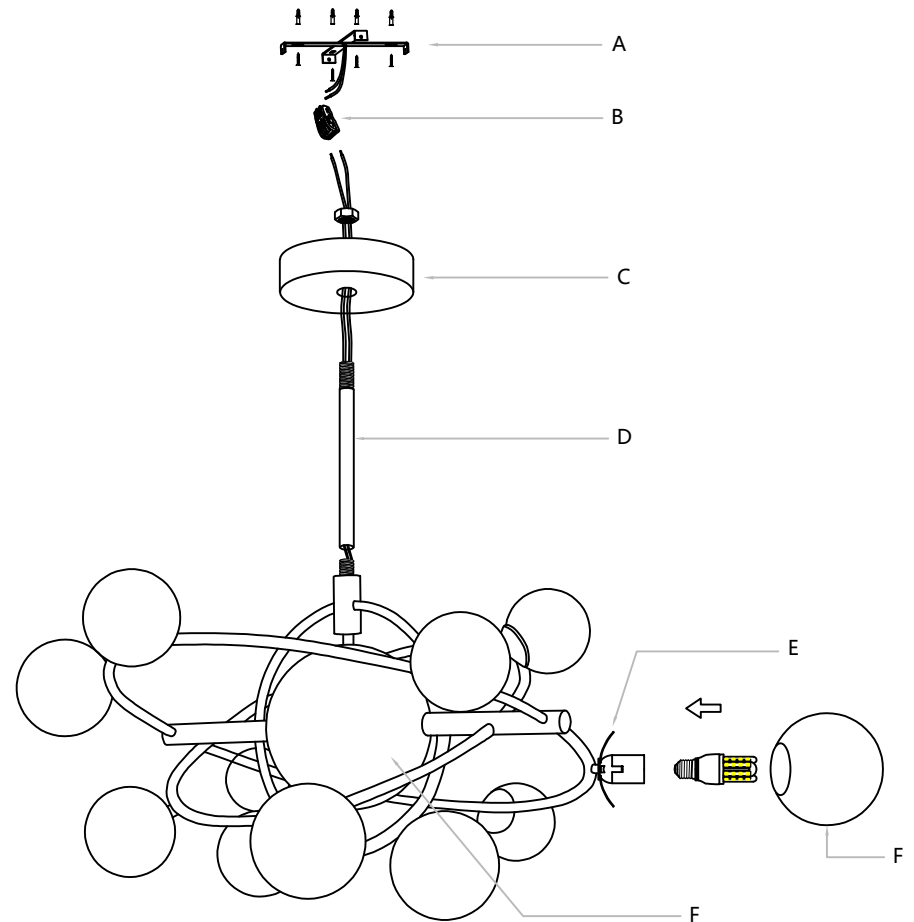

Pass the wires on the lamp stand through the connecting rod (D) and insert them into the top cover (C). Then install the connecting rod (D) onto the top cover (C) and the lamp stand. Finally, install the glass cover (F) into the snap (E) on the lamp head. Use self-tapping screws to fix the mounting plate (A) to the wall. Then, connect the reserved wires on the lamp body (C) with the reserved wires on the wall and the junction box (B). Finally, install the lamp body (C) onto the mounting plate (A).