



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

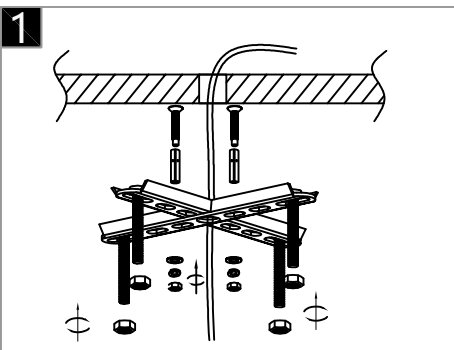


First, fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

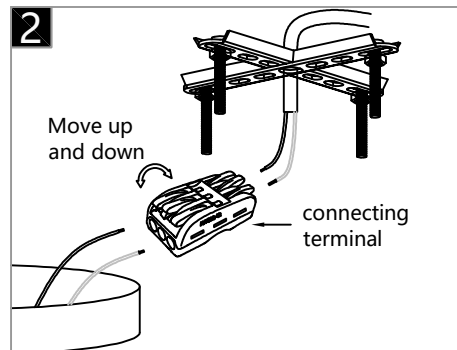


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

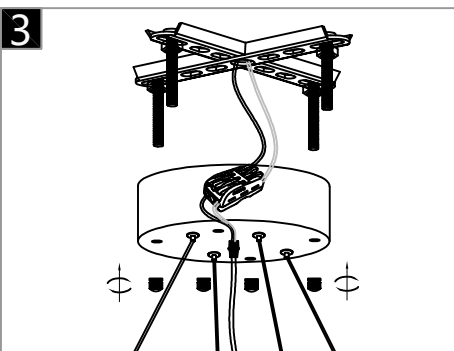

Align the holes on the canopy with the screws on the mounting plate, and then use the wing nut to secure it from the bottom.

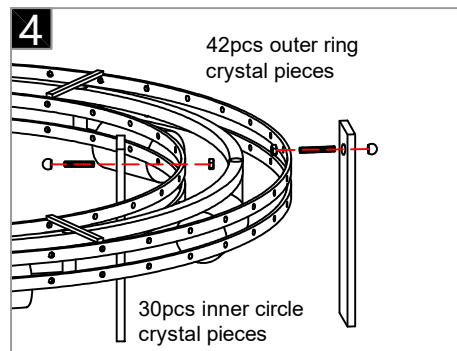


Install the glass pieces on the lamp holder, 42 pieces of the outer ring are installed according to the up and down dislocation, and 30 pieces of the inner ring are installed according to the up and down dislocation.

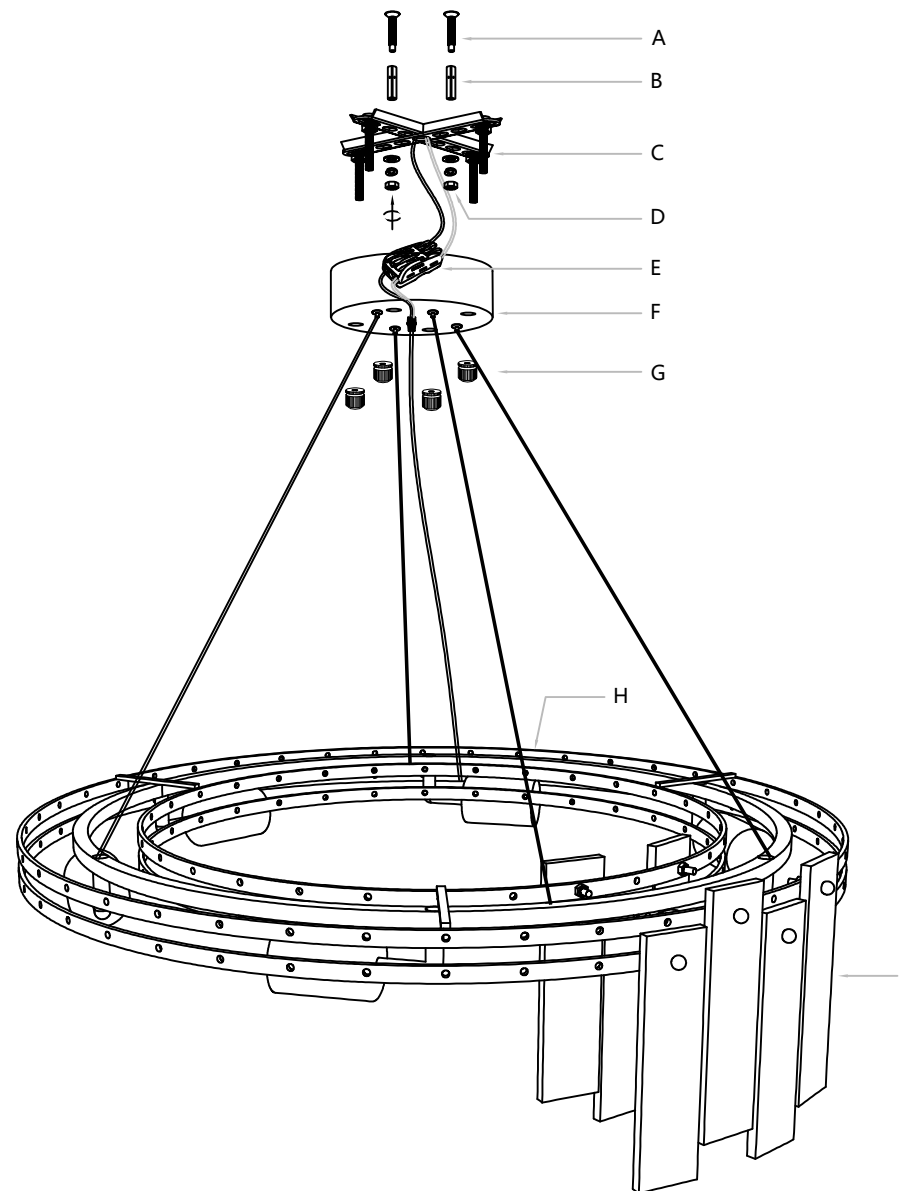

First, set the dowel (B) on the expansion screw (A) and fix it on the ceiling, then align the hole of the mounting plate (C) with the expansion screw (A) and then lock it from the bottom with the nut and gasket, then connect the wire on the lamp and the wire on the ceiling to the terminal (E), then align the hole of the lamp top cover (F) with the screw on the mounting plate (C), Then lock the bottom of the top cover (F) with a flower nut (G), and finally install the glass piece (I) on the light frame (H) in the way as shown in the drawing.


Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.

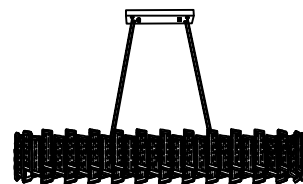


Product style diagram


Steps of installation

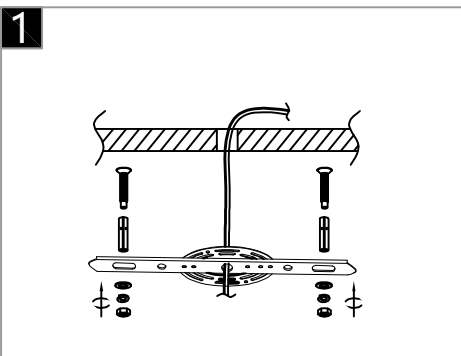


fix the expansion screws onto the ceiling, and then lock the mounting plate onto the screws.

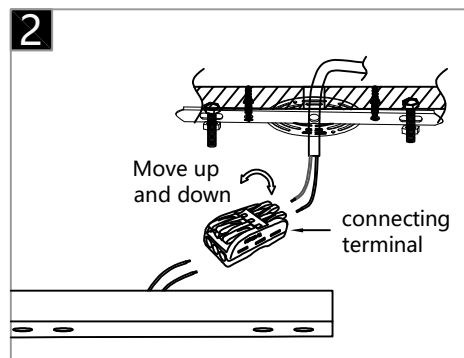


Connect the wires inside the luminaire and ceiling to the terminal, usually neutral wire (white), hot wire (black)

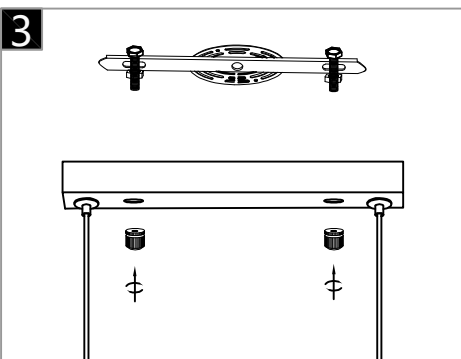

Align the top cover hole position on the luminaire with the screws on the mounting plate and then secure from the bottom using the nut.

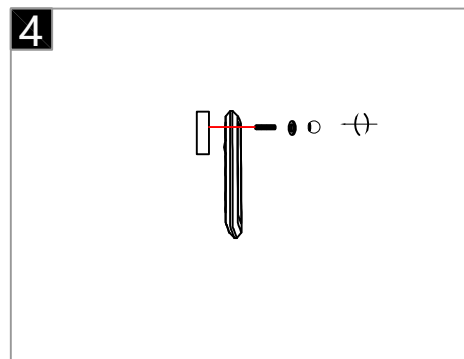

Finally, install the crystal pieces onto the lamp stand, and then tighten the nuts.

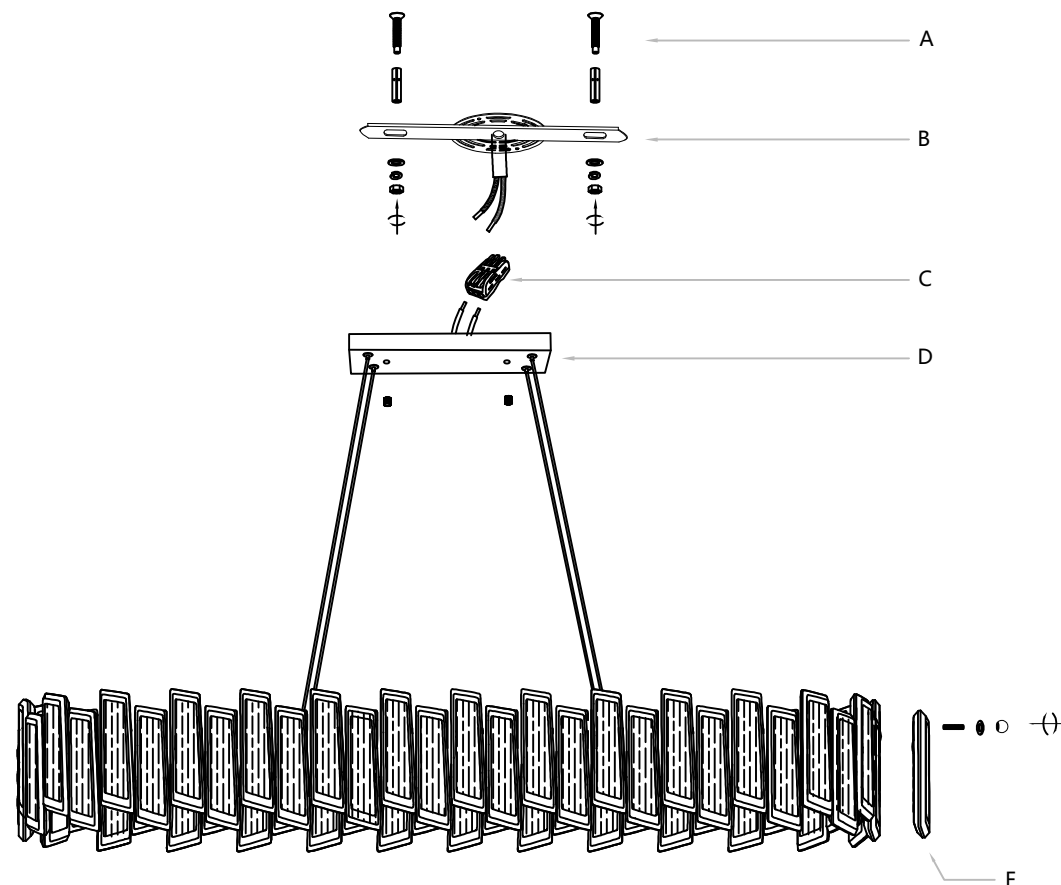

First, install the lamp ring (D) on the top cover (C), then tighten the screws. Next, fix the mounting plate (A) to the ceiling, then connect the wires of the top cover (C) to the wires on the ceiling and to the terminal block (B). Then align the holes on the top cover (C) with the holes on the mounting plate (A), and tighten the screws. Finally, install the crystal piece (E) onto the lamp stand, and then tighten the nut.